


RevitWorks Door Factory: Clearance Diagrams

Using clearance diagrams within the RevitWorks Door Factory.

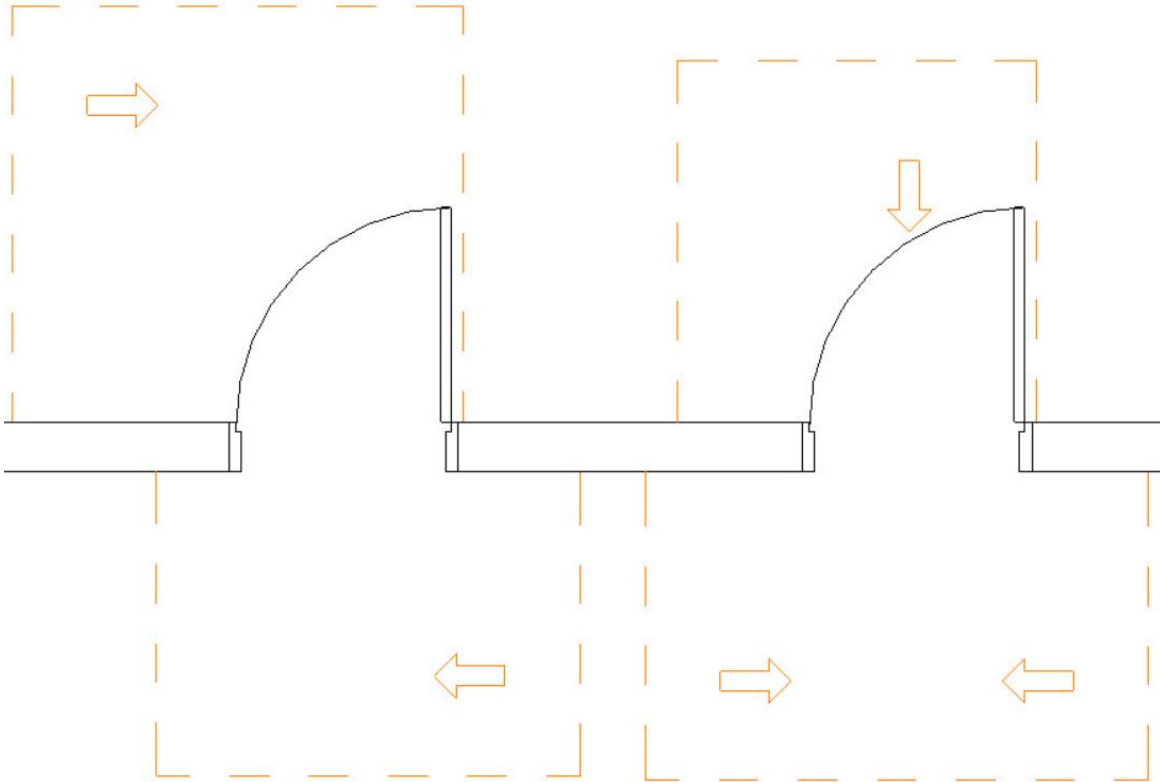

PLEASE READ:

While we have done our best to ensure the clearance diagrams we have created follow the specified standards, RevitWorks Ltd expressly disclaims any warranty for this content.


This content is provided "As Is" without any express or implied warranty of any kind.

Contents

RevitWorks Door Factory: Clearance Diagrams	1
PLEASE READ:	1
Setting up Clearance Diagrams:.....	2
Using Clearance Diagrams within your project:	2
Clearance Diagram Collateral:	3
ICC A117.1-2017	3
ADA 2010	4
AS1428.1 (2009)	5


Setting up Clearance Diagrams:

When the Door Factory has been installed, the “Add clearance diagrams” button will be greyed out and un-tickable

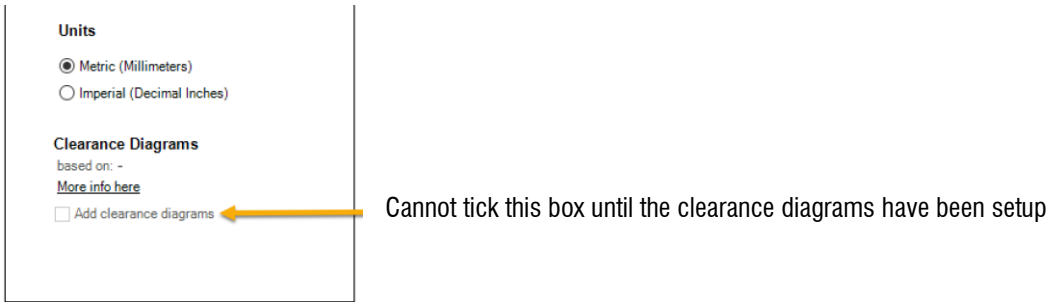


This happens to ensure that you select the correct Door Factory clearance diagrams to be used **before** allowing them to be added to the door. To setup, go to the Door Factory “Default Settings” and:

1. Click the “Allow diagrams to be added to doors” checkbox
2. Ensure that the “Clearance Diagram Location” is pointing to the correct clearance diagram directory

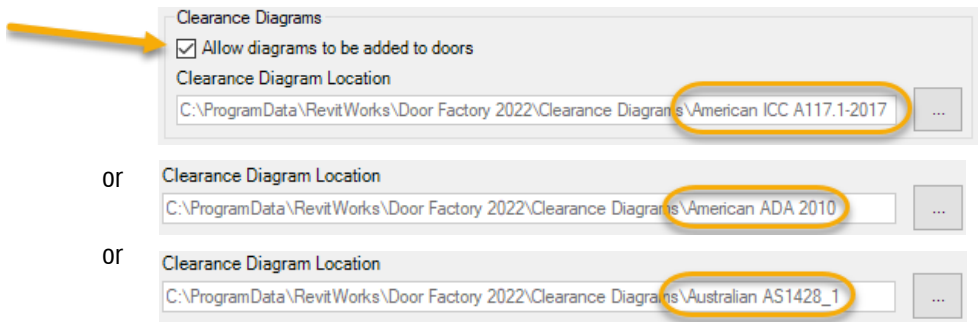

Once this has been done, the “Add clearance diagrams” button will be tickable and the standard used will be populated

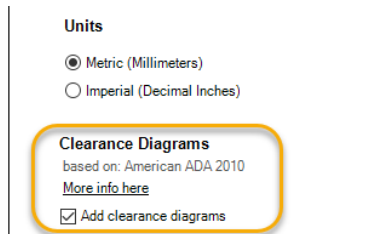


Using Clearance Diagrams within your project:


If the “Add clearance diagrams” button is ticked as per the previous page, clearance diagrams will be added to the following doors as you make them:

- Single swing Single Swing 2way Double Swing Double wing 2 Way Single Pivot Double Pivot
- Surface Slider 1+0 and 1+1 Pocket Slider 1+0 and 1+1 Contained Slider 1+1 Fixed

They are accessible within the instance parameters of the “Graphics” grouping for the door used within your project as a pull-down “family-type” parameter (they default to “(none)”.

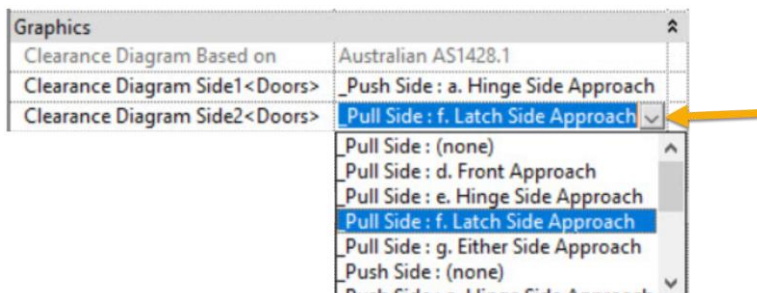

It's then up to the user to make a valid choice for both sides of the door to suit the direction of travel. Once done, they will show up as expected in plans.

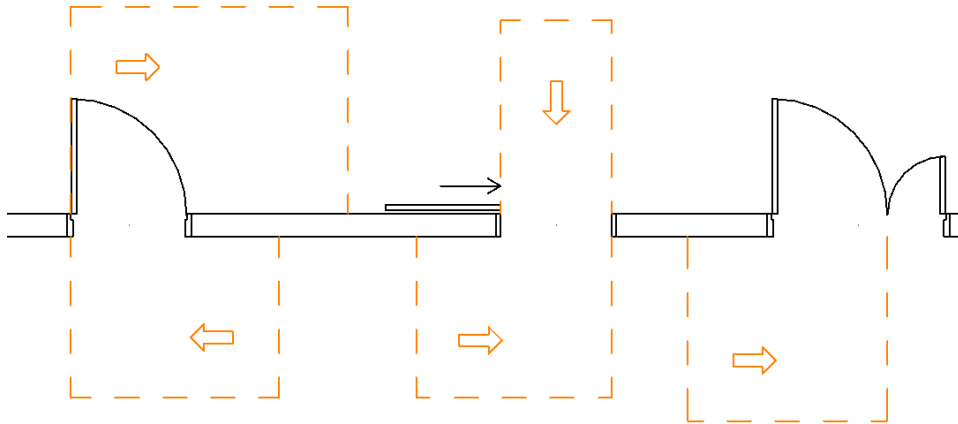

Using “Family Type” pulldown parameters:


The way family type pull-down parameter selections work within Revit means that if there are any other door families nested in that door (which there are) and/or door families (or components) that have been “shared” and are in the project (i.e. in the family editor the “Shared” button is ticked within the properties of the door) they will also show up as selectable within these clearance diagram pull-downs: Obviously if you choose one of those items instead, they won't work – use with care.

Clearance Diagram Collateral:

The following diagrams are what the RevitWorks clearance diagrams are based on.


It is up to you, the end user, to ensure they are relevant for your jurisdiction and project. This content is provided “As Is” without any express or implied warranty of any kind.

ICC A117.1-2017

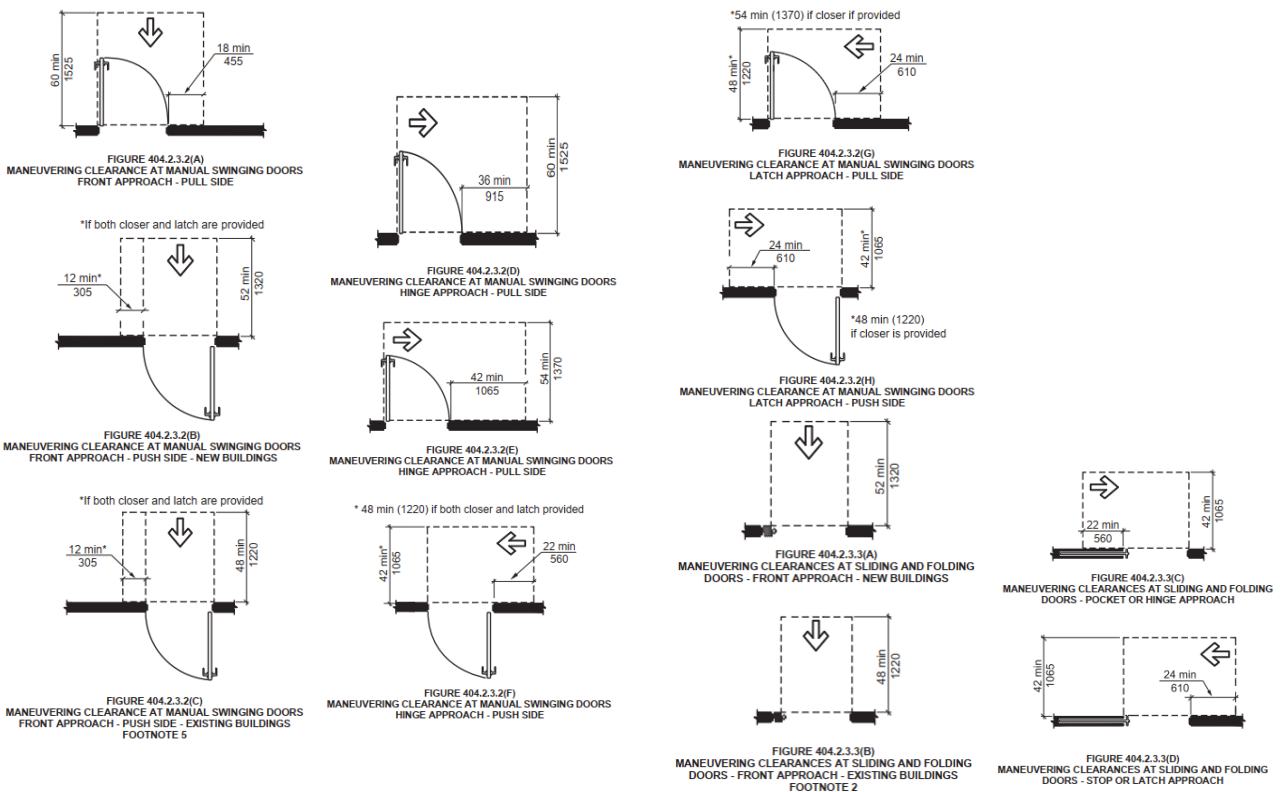


(continues next page)

ADA 2010

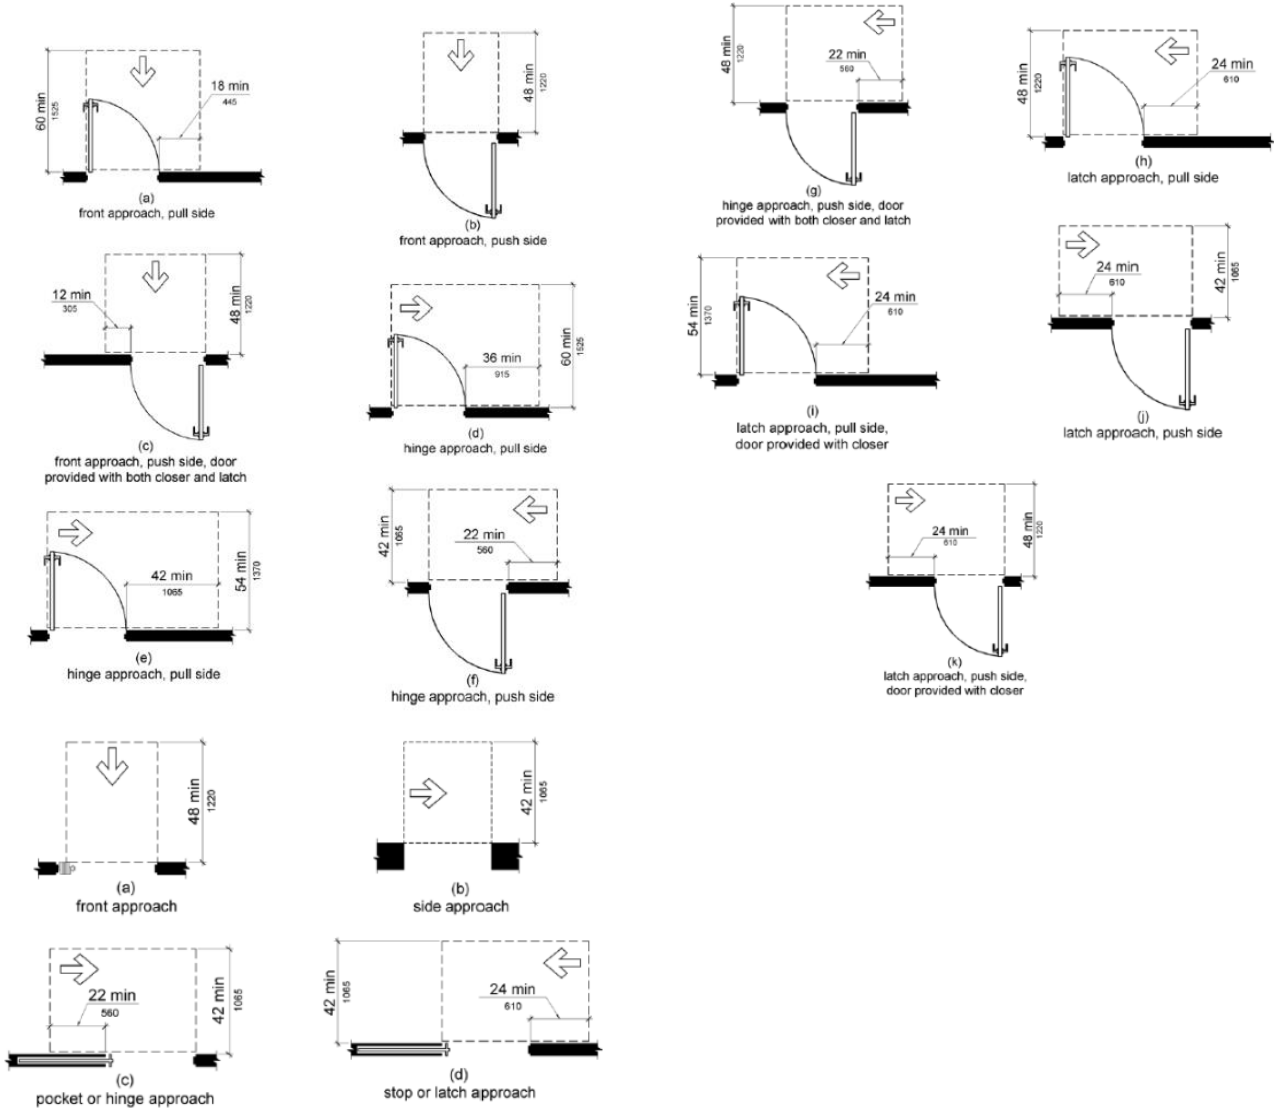


(continues next page)

AS1428.1 (2009)




Dimension D	Dimension L	Dimension WH	Dimension WL
850	1220	560	340
900	1185	510	340
950	1160	460	340
1000	1140	410	340

(a) Hinge-side approach, door opens away from user




Dimension D	Dimension L	Dimension WH	Dimension WL
850	1240	240	660
900	1210	190	660
950	1175	140	660
1000	1155	90	660

(b) Latch-side approach, door opens away from user




Dimension D	Dimension L	Dimension WH	Dimension WL
850	1670	660	900
900	1670	610	900
950	1670	560	900
1000	1670	510	900

(e) Hinge-side approach, door opens towards user




Dimension D	Dimension L	Dimension WH	Dimension WL
850	1670	110	900
900	1670	110	900
950	1670	110	900
1000	1670	110	900

(f) Latch-side approach, door opens towards user




Dimension D	Dimension L	Dimension WH	Dimension WL
850	1240	560	660
900	1210	510	660
950	1175	460	660
1000	1155	410	660

(c) Either side approach, door opens away from user




Dimension D	Dimension L	Dimension WH	Dimension WL
850	1450	0	510
900	1450	0	510
950	1450	0	510
1000	1450	0	510

(d) Front approach, door opens away from user



Dimension D	Dimension L	Dimension WH	Dimension WL
850	1670	660	900
900	1670	610	900
950	1670	560	900
1000	1670	510	900

(g) Either side approach, door opens towards user



Dimension D	Dimension L	Dimension WH	Dimension WL
850	1450	110	530
900	1450	110	530
950	1450	110	530
1000	1450	110	530


(h) Front approach, door opens towards user

LEGEND:
 D = Clear opening of width of doorway
 L = Length
 WH = Width—hinge side
 WL = Width—latch side
 → = Direction of approach
 --- = Circulation space

DIMENSIONS IN MILLIMETRES


LEGEND:
 D = Clear opening of width of doorway
 L = Length
 WH = Width—hinge side
 WL = Width—latch side
 ↓ = Direction of approach
 --- = Circulation space

DIMENSIONS IN MILLIMETRES




Dimension D	Dimension L	Dimension WH	Dimension WL
850	1280	660	395
900	1280	610	395
950	1280	560	395
1000	1280	510	395

(a) Slide-side approach




Dimension D	Dimension L	Dimension WH	Dimension WL
850	1230	185	660
900	1230	180	660
950	1230	180	660
1000	1230	180	660

(b) Latch-side approach



Dimension D	Dimension L	Dimension WH	Dimension WL
850	1280	660	660
900	1280	610	660
950	1280	560	660
1000	1280	510	660

(c) Either side approach



Dimension D	Dimension L	Dimension WH	Dimension WL
850	1450	0	530
900	1450	0	530
950	1450	0	530
1000	1450	0	530

(d) Front approach

LEGEND:
 D = Clear opening of width of doorway
 L = Length
 WH = Width—hinge side
 WL = Width—latch side
 → = Direction of approach
 --- = Circulation space

DIMENSIONS IN MILLIMETRES

(end of document)